


# PRODUCT CATALOGUE 2020/2021

## EXPORT



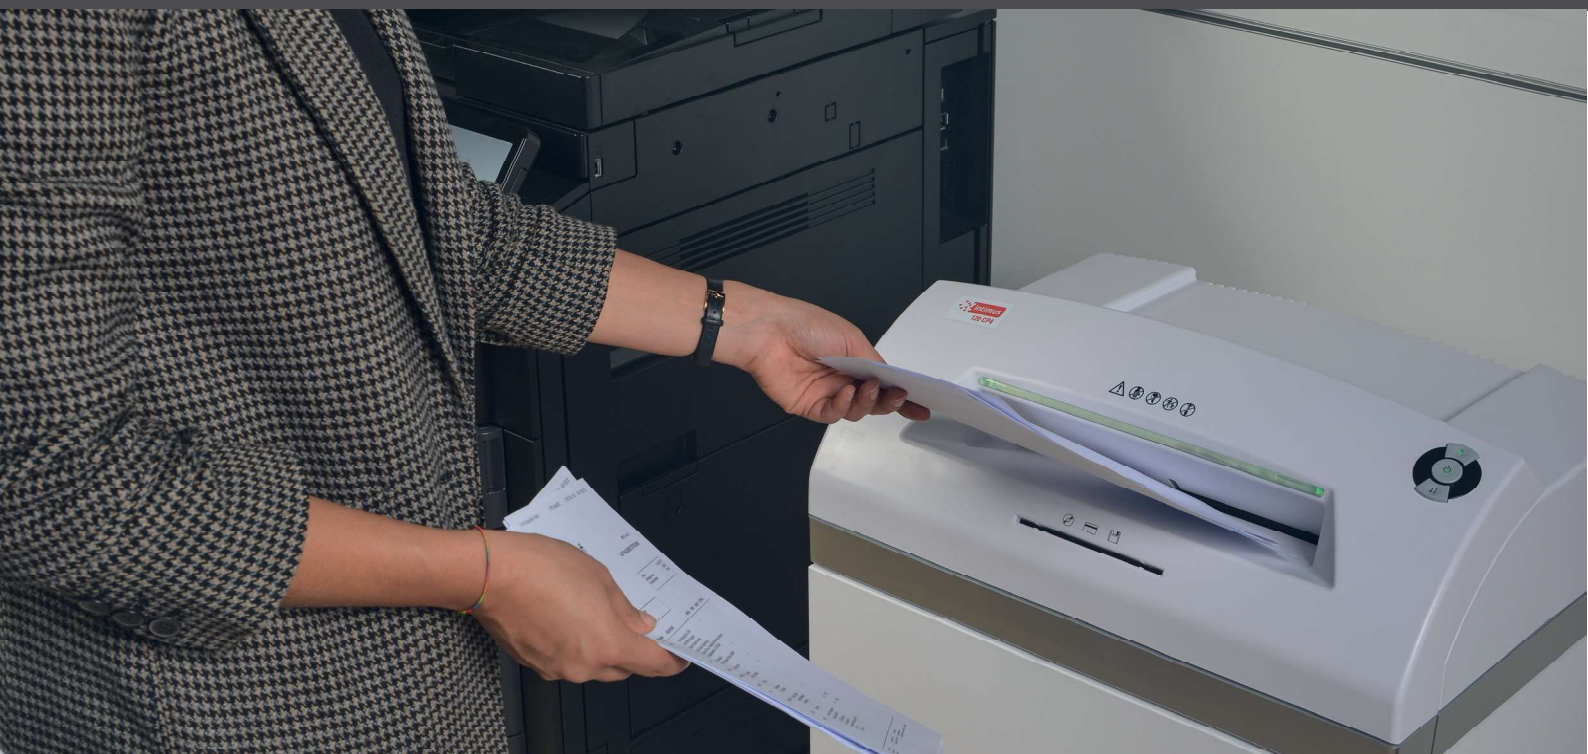

# CONTENTS

## INTIMUS INTERNATIONAL GROUP

Company Presentation .....	3
Official distribution network & national technical support services .....	3
Our lines of business .....	4
What is GDPR? .....	5
How can intimus help with data processing compliance .....	5
What Security levels are there and what are they for? .....	6

## PRODUCTS

Shredders .....	7
IT Security .....	18
Consumables for Shredders .....	21
Paper Trimmers .....	22
Guillotines .....	25
Consumables for Trimmers and Guillotines .....	28
Binding Machines .....	29
Consumables for Binding Machines .....	31
Laminators .....	32
Creasing Machines .....	33
Folding Machines .....	34
Folder Inserters .....	35
Address Printer .....	38
Letter Opener .....	38

## ABOUT US

Why us? .....	39
Contact .....	40



## INTIMUS INTERNATIONAL GROUP

At **intimus International Group**, we advise our clients in selecting their equipment for **Offices, Digital Printing Centres, Graphic Design and Direct Marketing**.

Our team of professionals with 55 years of industry experience is committed to helping our customers improve their productivity and consequently their competitiveness and profits.

Our extensive range of post-print finishing products allows us to offer a broad portfolio that perfectly complements that of our **Official Distribution Network**.

We hope that you will find this **new product catalogue** informative and useful and remain at your disposal to answer any further questions you may have.

## OFFICIAL DISTRIBUTION NETWORK AND NATIONAL TECHNICAL SUPPORT SERVICES

Our qualified personnel with a proven track record in the sector is highly motivated to offer you a fast, effective, personal and professional service, guaranteeing the best sales advice on the desired product and a preventive and corrective service for your folding machine, inserting machine, shredder, guillotine, laminator, etc.



Follow us on social media   



### **INFORMATION SECURITY**

Shredding and media destruction solutions trusted by corporations and security agencies around the world when it comes to protection against data breaches.



### **BUSINESS INFORMATION SOLUTIONS**

Tools for effective document processing, both in digital and paper format, that help improve the efficiency and communication capacity of companies, service offices and government agencies.

## **OUR CUSTOMERS AND KEY SECTORS**



**BANKS**



**GOVERNMENT**




**LABORATORIES**



**HOSPITALS**



**LARGE ENTERPRISES**



**MANAGEMENT FIRMS**



**TRANSPORT**



**RECYCLERS**



**EDUCATION**



**SMES**



# General Data Protection Regulation

## WHAT IS GDPR?


GDPR (General Data Protection Regulation) is the European regulation on the protection of individuals with regard to the processing of personal data and the free movement of such data.

## AS OF WHEN MUST GDPR BE APPLIED?

GDPR entered into effect on 24 May 2016 and must be complied with since 25 May 2018. This entails the need and obligation for both public and private entities to carry out various measures to ensure the correct processing of data.


## WE HELP TO FULLY COMPLY WITH THE PRINCIPLES OF DATA PROTECTION

intimus provides shredders with the standardized security levels.




**Level P1 - P2**  
(Strip cut)

- Internal data
- Preprints
- Reports
- Forms
- Notes, etc.



**Level P3 - P4**  
(Particle cut)

- Invoices
- Financial documents
- Customer data
- Curriculums
- Payroll data, etc.



**Level P5 - P7**  
(Micro cut)

- Medical reports
- Highly confidential documents
- Projects
- Designs
- R&D documents, etc.

## INTIMUS QUALITY COMMITMENT

### i-control®

#### Seamless data protection.

A holistic approach to information centres ensuring ease of use and maximum data protection. intimus® shredders are controlled by the i-control® system, which is the heart of all shredder functions and provides comprehensive visual information for maximum clarity.

### EcoLogic

#### Maximum energy efficiency at all times.

This is one of our main defining qualities. intimus® shredders and media destruction solutions are equipped with the “EcoLogic” energy management system as a quality standard. The devices stay in “sleep mode” after they have been idle for a while, thereby reducing their energy consumption to zero.

### DLS

#### Trouble-free long-term use.

The Dynamic Load Sensor (DLS) system detects the paper volume while feeding the cutting unit, protects against possible overloads and jamming, and extends the useful life of the machine.

### C-Drive

#### Maximum performance: our shredders.

intimus® uses the C-Drive motor design: consistent performance, constant speed, compact design and quiet operation. intimus® shredders are manufactured with capacitor motors to deliver a constant rotational speed and increased performance throughout their service life.

### 2x2

#### Respect for the environment.

intimus® data destruction devices come with a variety of convenient features that complement their versatile application options. The 2x2 cutting and collection system consisting of a paper container and a compact disk container stores the different types of shredded material separately. Eco-friendly elimination.

### Silentec®

#### Shredders have never been so silent.

Shredders should be placed as close to the workplace as possible. The intimus® shredder range features Silentec®, a completely new cutting head bearing design delivering maximum vibration absorption during shredding.

### SolidCut

#### Long useful life.

SolidCut offers significant advantages in terms of cutting strength, precision and shredder life. intimus® engineers have developed a sophisticated manufacturing process that incorporates CNC cylinders to achieve greater steel hardness as well as a special heat treatment that guarantees a much longer life cycle of the cutting cylinders. Even after years of operation, intimus® shredders still deliver excellent results.






## intimus NEOSHRED S11 CP4 & S13 CP4

Shredders for personal and occasional use, at home or at the office. 3-position multifunction switch. Automatic start / stop. Can manage staples, clips, credit cards & CDs. Separate paper and CD compartments. Convenient handle for lifting off the cutting head from the container. Working width: 220 mm. Paper container with level indicator viewing window. Shredding speed: 30 mm/sec. Continuous use: 2 minutes. Manual reverse. Cutting blade warranty: 10 years. CE-certified.



Dimensions (W x D x H): 300 x 200 x 350 mm. (S11 CP4)  
 Dimensions (W x D x H): 300 x 200 x 375 mm. (S13 CP4)  
 Weight: 3.5 kg. / 3.7 kg



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus NEOSHRED S11 CP4	4 x 35	Particles	7	6	P-4/T-4*	  	11 litres	200	262101	ON REQUEST
intimus NEOSHRED S13 CP4	4 x 35	Particles	9	8	P-4/T-4*	  	13 litres	250	262301	ON REQUEST

\*ID documents only







## intimus NEOSHRED S18 CP4 & S21 CP4

Shredders for personal and occasional use, at home or at the office. 3-position multifunction switch. Automatic start / stop. Can manage staples, clips, credit cards & CDs. Separate paper and CD compartments. Convenient handle for lifting off the cutting head from the container. Working width: 220 mm. Paper container with level indicator viewing window. Shredding speed: 30 mm/sec. Continuous use: 2 minutes. Manual reverse. Cutting blade warranty: 10 years. CE-certified.



Dimensions (W x D x H): 350 x 230 x 400 mm. (S18 CP4)  
 Dimensions (W x D x H): 350 x 270 x 470 mm. (S21 CP4)  
 Weight: 5.2 kg. / 5.3 kg



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus NEOSHRED S18 CP4	4 x 35	Particles	12	10	P-4/T-4*	  	18 litres	330	262501	ON REQUEST
intimus NEOSHRED S21 CP4	4 x 35	Particles	14	12	P-4/T-4*	  	21 litres	350	262701	ON REQUEST

\*ID documents only

## intimus 21 CP4

Shredder for personal and occasional use, at home or at the office. 3-position multifunction switch. Automatic start / stop. Can manage staples, clips, credit cards & CDs. Separate paper and CD compartments. Convenient handle for lifting off the cutting head from the container. Working width: 220 mm. Paper container with level indicator viewing window. Shredding speed: 40 mm/sec. Continuous use: 30 minutes. Manual reverse. Cutting blade warranty: 2 years. CE-certified.



Dimensions (W x D x H): 350 x 270 x 470 mm  
 Weight: 8 kg



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 21 CP4	4 x 39	Particles	16	14	P-4/O-3/T-4	  	21.5 litres	410	256101	ON REQUEST





## Shredders

### intimus 1000 S & 1000 C

Shredder with castors for office use. 3-position multifunction switch. LED control display. Automatic start / stop via photoelectric sensor. Can manage staples & credit cards. Removable paper container with level indicator viewing window. Low noise level. Working width: 230 mm. Shredding speed: 40/50 mm/sec. Continuous use: up to 8 minutes. Auto reverse. Cutting blade warranty: 10 years. CE-certified.

Dimensions (W x D x H): 350 x 250 x 570 mm  
Weight: 7.1 / 8.5 kg









Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 1000 S	4	Strips	12 10	P-2/T-2	 	21 litres	350	251101	ON REQUEST
intimus 1000 C	3.8 x 48	Particles	9 8	P-3/T-3/F	 	21 litres	350	251151	ON REQUEST

### intimus 2500 S & 2500 C

Shredders with castors for office use. 2 Push buttons for manual forward and reverse. LED control display. Automatic start / stop via photoelectric sensor. Can manage staples, clips, credit cards & CDs. Removable paper container with level indicator viewing window. Low noise level. Working width: 230 mm. Shredding speed: 40/50 mm/sec. Continuous use: up to 4 minutes. Auto reverse. Cutting blade warranty: 10 years. CE-certified.

Dimensions (W x D x H): 400 x 300 x 600 mm  
Weight: 10.2 / 11.6 kg









Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 2500 S	4.1	Strips	19 17	P-2/O-1/T-2	  	32 litres	320	252201	ON REQUEST
intimus 2500 C	4 x 39	Particles	16 14	P-4/O-3/T-4/F	  	32 litres	320	252251	ON REQUEST

### intimus 3000 S & 3000 C

Shredders with castors for office use. 2 Push buttons for manual forward and reverse. LED control display. Automatic start / stop via photoelectric sensor. Can manage staples, clips, credit cards & CDs. Removable paper container with level indicator viewing window. Low noise level. Working width: 230 mm. Shredding speed: 30 mm/sec. Continuous use: up to 5 minutes. Auto reverse. Cutting blade warranty: 10 years. CE-certified.

Dimensions (W x D x H): 420 x 340 x 660 mm  
Weight: 14.5 / 15.5 kg



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 3000 S	4	Strips	22 20	P-2/O-2/T-2	  	39 litres	370	253101	ON REQUEST
intimus 3000 C	3.8 x 48	Particles	20 18	P-3/O-2/T-3/F	  	39 litres	370	253151	ON REQUEST




## intimus Confidential

Shredder with castors for office use. LED control display. Automatic start / stop via photoelectric sensor. Can manage staples, clips, credit cards & CDs. Separate paper and CD compartments. Full bin indicator. Removable paper container with level indicator viewing window. Working width: 220 mm. Shredding speed: 50 mm/sec. Continuous use: up to 7 minutes. Cutting blade warranty: 10 years. CE-certified.

Dimensions (W x D x H): 350 x 270 x 570 mm  
Weight: 13.5 kg



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup> 180 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus Confidential	2 x 8	Particles	8 8	P-5/F-2/O-1/T-2		15 litres	360	260101	ON REQUEST

## intimus 29 CP4

Shredder with castors for office use. LED control display. Automatic start / stop via photoelectric sensor. Can manage staples, clips, credit cards & CDs. Full bin indicator. Removable paper container with level indicator viewing window. Low noise level. Working width: 220 mm. Shredding speed: 50 mm/sec. Continuous use: up to 50 minutes. Cutting blade warranty: 2 years. CE-certified.

Dimensions (W x D x H): 400 x 280 x 550 mm  
Weight: 12.4 kg



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup> 180 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 29 CP4	4 x 39	Particles	18 16	P-4/O-3/T-4		29 litres	580	257101	ON REQUEST

## intimus 34 CP7

Shredder with castors for office use. LED control display. Automatic start / stop via photoelectric sensor. Full bin indicator. Removable paper container with level indicator viewing window. Low noise level. Working width: 220 mm. Shredding speed: 60 mm/sec. Continuous use: up to 30 minutes. Cutting blade warranty: 2 years. CE-certified.

Dimensions (W x D x H): 410 x 320 x 600 mm  
Weight: 17.5 kg



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup> 180 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 34 CP7	1 x 5	Particles	8 7	P-7		34 litres	580	258101	ON REQUEST

## Shredders

### intimus 45 & intimus 60

Shredders for office use. i-control control panel with clear and intuitive visual indicators for using the device. Automatic start / stop via photoelectric sensor. Easy visualisation of the paper load level by means of the DLS device with clear indicator lights. Automatic reverse function for easy resolution of jams caused by paper overload. Can manage staples, clips, credit cards & CDs. 2 X 2 collection system consisting of a paper container and a compact disk container stores the different types of shredded material separately for eco-friendly elimination. Full bin indicator. Removable paper container. Exclusive design with wooden cabinet and castors. Low noise level (< 55 db) via Silentec system. Working width: 235 mm. Shredding speed: 70-80 mm/sec. EcoLogic energy saving system with automatic shutdown after 5 minutes of idle time. Cutting blade warranty: 30 years (2 years for P7). CE-certified. **Model intimus 45 / 60 CP7 is available with automatic oiler (AO).**













Dimensions (W x D x H): 450 x 390 x 660 mm (45)

Dimensions (W x D x H): 450 x 390 x 770 mm (60)

Weight: 31 kg (45SP) - 32 kg (45CP) / 34 kg (60SP) - 36 kg (60CP)



5-10

Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 45 SP2	3.8	Strips	24	21	P-2/O-1/T-2		45 litres	700	278101	ON REQUEST
intimus 45 CP4	3.8 x 30	Particles	15	13	P-4/F-1/O-1/T-2		45 litres	550	278151	ON REQUEST
intimus 45 CP5	1.9 x 15	Particles	11	11	P-5/F-2/O-1/T-2		45 litres	550	278171	ON REQUEST
intimus 45 CP7	0.8 x 4.5	Particles	6	5	P-7/F-3		45 litres	700	278291	ON REQUEST
intimus 45 CP7 AO	0.8 x 4.5	Particles	6	5	P-7/F-3		45 litres	700	278891	ON REQUEST
intimus 60 SP2	3.8	Strips	24	21	P-2/O-1/T-2		60 litres	700	279101	ON REQUEST
intimus 60 CP4	3.8 x 30	Particles	15	13	P-4/F-1/O-1/T-2		60 litres	550	279151	ON REQUEST
intimus 60 CP5	1.9 x 15	Particles	11	10	P-5/F-2/O-1/T-2		60 litres	550	279171	ON REQUEST
intimus 60 CP7	0.8 x 4.5	Particles	6	5	P-7/F-3		60 litres	700	279291	ON REQUEST
intimus 60 CP7 AO	0.8 x 4.5	Particles	6	5	P-7/F-3		60 litres	700	279891	ON REQUEST

### intimus 100






Shredder for office use. Automatic start / stop via photoelectric sensor. Automatic reverse function for easy resolution of jams caused by paper overload. Can manage staples, clips and credit cards. Can manage staples, clips & credit cards. Full bin, jam and door open indicator lights. Removable paper container. Exclusive design with wooden cabinet and castors. Low noise level (56 db). Working width: 260 mm. Shredding speed: 100 -140 mm/sec. Cutting blade warranty: 30 years (2 years for level P6 and P7 models). CE-certified.

Dimensions (W x D x H): 490 x 440 x 900 mm

Weight: 43 kg



10-20

Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 100 SP2	3.8	Strips	25	21	P-2/T-2		100 litres	1100	224101	ON REQUEST
intimus 100 CP4	3.8 x 36	Particles	20	17	P-4/F-1/T-4		100 litres	1100	224151	ON REQUEST
intimus 100 CP5	1.9 x 15	Particles	15	13	P-5/F-2		100 litres	1100	224171	ON REQUEST
intimus 100 CP6	0.8 x 12	Particles	10	9	P-6/F-3 / T-6		100 litres	1100	224181	ON REQUEST
intimus 100 CP7	0.8 x 4.5	Particles	10	6	P-7/F-3		100 litres	1500	224191	ON REQUEST



## intimus 85 OmniShred & intimus 115 OmniShred



Powerful, multifunctional shredder for office use with smart feeders for maximum user flexibility. Can manage a variety of material: paper sheets or crumpled paper, cardboard, foil-laminated documents, ID cards, key cards, credit cards, passports, CDs, DVDs and floppy disks. The top feeder is secured against splinters with a transparent sliding door allowing to follow the destruction process. Equipped with an automatic oiler and i-control panel with clear and intuitive visual indications. Automatic start / stop via photoelectric sensor. Suitable for continuous use. A permanent automatic forward and reverse function prevents jams in case of overload without overheating. With wooden cabinet and mounted on castors. Low noise level (63 db). Working width: 305 mm. Shredding speed (paper): 160 mm/sec. EcoLogic energy saving system with automatic shutdown after 5 minutes of idle time. Cutting blade warranty: 30 years. CE-certified.

**NEW**



Dimensions (W x D x H): 660 x 550 x 808 mm (85)  
 Dimensions (W x D x H): 660 x 550 x 1085 mm (115)  
 Weight: 90 kg / 100 kg



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 85 OmniShred	3.6 x 43	Particles	32 30	P-4/O-3/T-4		68 litres	1100	333301	ON REQUEST
intimus 115 OmniShred	3.6 x 43	Particles	32 30	P-4/O-3/T-4		115 litres	1100	333401	ON REQUEST











## intimus 120

Professional shredder for office use. i-control control panel with clear and intuitive visual indicators for using the device. Automatic start / stop via photoelectric sensor. Easy visualisation of the paper load level by means of the DLS device with clear indicator lights. Automatic reverse function for easy resolution of jams caused by paper overload. Can manage staples, clips, credit cards & CDs. 2 X 2 collection system consisting of a paper container and a compact disk container stores the different types of shredded material separately for eco-friendly elimination. Full bin indicator. Removable paper container. Exclusive design with wooden cabinet and castors. Low noise level (57 db) via Silentec system. Working width: 310 mm. Shredding speed: 100 mm/sec. EcoLogic energy saving system with automatic shutdown after 5 minutes of idle time. Cutting blade warranty: 30 years (2 years for level P6 and P7 models). CE-certified.

**Model intimus 120 is available with automatic oiler (AO).**

Dimensions (W x D x H): 540 x 400 x 980 mm  
 Weight: 46 kg (120SP) - Weight: 47 kg (120AO)



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 120 SP2	5.8	Strips	38 36	P-2/O-1/T-2		120 litres	1800	227131	ON REQUEST
intimus 120 SP2	3.8	Strips	33 31	P-2/O-1/T-2		120 litres	1800	227101	ON REQUEST
intimus 120 CP4	3.8 x 36	Particles	25 23	P-4/F-1/O-1/T-2		120 litres	1800	227151	ON REQUEST
intimus 120 CP5	1.9 x 15	Particles	17 15	P-5/F-2/O-1/T-2		120 litres	1800	227171	ON REQUEST
intimus 120 CP6	0.8 x 12	Particles	12 10	P-6/F-3/T-6		120 litres	1800	227281	ON REQUEST
intimus 120 CP7	0.8 x 4.5	Particles	8 7	P-7/F-3		120 litres	1800	227291	ON REQUEST
intimus 120 CP4 AO	3.8 x 36	Strips	25 23	P-4/F-1/O-1/T-2		120 litres	1800	227721	ON REQUEST
intimus 120 CP5 AO	1.9 x 15	Particles	17 15	P-5/F-2/O-1/T-2		120 litres	1800	227731	ON REQUEST
intimus 120 CP6 AO	0.8 x 12	Particles	12 10	P-6/F-3/T-6		120 litres	1800	227801	ON REQUEST
intimus 120 CP7 AO	0.8 x 4.5	Particles	8 7	P-7/F-3		120 litres	1800	227811	ON REQUEST



## Shredders

### intimus 130







Professional shredder for office use. i-control control panel with clear and intuitive visual indicators for using the device. Automatic start / stop via photoelectric sensor. Easy visualisation of the paper load level by means of the DLS device with clear indicator lights. EcoLogic energy saving system with automatic shutdown after 5 minutes of idle time. Automatic reverse function for easy resolution of jams caused by paper overload. Can manage staples, clips & credit cards. High-capacity hardened cardboard waste container. Full bin indicator. Removable paper container. Exclusive design with wooden cabinet and castors. Low noise level (< 55 db) via Silentec system. Working width: 405 mm. Shredding speed: 140 mm/sec. Cutting blade warranty: 30 years. CE-certified.



Dimensions (W x D x H): 660 x 430 x 1020 mm.

Weight: 60 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup> 180 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 130 SP2	3,8	Strips	25	22	P-2/T-2	 	130 litres	1100	225101	ON REQUEST
intimus 130 CP4	3.8 x 36	Particles	22	19	P-4/F-1/T-4	 	130 litres	1100	225151	ON REQUEST
intimus 130 CP5	1.9 x 15	Particles	16	13	P-5/F-2/T-5	 	130 litres	1100	225171	ON REQUEST

### intimus 175

Professional shredder for office use. i-control control panel with clear and intuitive visual indicators for using the device. Automatic start / stop via photoelectric sensor. Easy visualisation of the paper load level by means of the DLS device with clear indicator lights. EcoLogic energy saving system with automatic shutdown after 5 minutes of idle time. Automatic reverse function for easy resolution of jams caused by paper overload. Can manage staples, clips & credit cards. High-capacity hardened cardboard waste container. Full bin indicator. Removable paper container. Exclusive design with wooden cabinet and castors. Low noise level (< 55 db) via Silentec system.. Working width: 405 mm. Shredding speed: 120-230 mm/sec. Cutting blade warranty: 30 years (2 years for P6 & P7). CE-certified.






















**Model intimus 175 is available with automatic oiler (AO).**

Dimensions (W x D x H): 660 x 560 x 1050 mm.

Weight: 90 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup> 180 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 175 SP2	5,8	Strips	70	60	P-2/T-2	  	175 litres	1100	297121	ON REQUEST
intimus 175 CP4	4 x 40	Particles	50	43	P-4/F-1/T-4	  	175 litres	1100	297131	ON REQUEST
intimus 175 CP5	1.9 x 15	Particles	30	26	P-5/F-2/T-5	  	175 litres	1100	297141	ON REQUEST
intimus 175 CP6	0.8 x 12	Particles	17	15	P-6/F-3		175 litres	1100	297151	ON REQUEST
intimus 175 CP7	0.8 x 4.5	Particles	10	9	P-7/F-3		175 litres	1100	297161	ON REQUEST
intimus 175 CP4 AO	4 x 40	Particles	50	43	P-4/F-1/T-4	  	175 litres	1100	297231	ON REQUEST
intimus 175 CP5 AO	1.9 x 15	Particles	30	26	P-5/F-2/T-5	  	175 litres	1100	297296	ON REQUEST
intimus 175 CP6 AO	0.8 x 12	Particles	17	15	P-6/F-3		175 litres	1100	297251	ON REQUEST
intimus 175 CP7 AO	0.8 x 4.5	Particles	10	9	P-7/F-3		175 litres	1100	297261	ON REQUEST

## intimus 175 hybrid Auto Oil

High-security, professional shredder for office use. i-control panel with clear and intuitive visual indicators for using the device. Automatic start / stop via photoelectric sensor. Easy visualisation of the paper load level by means of the DLS device with clear indicator lights. EcoLogic energy saving system with automatic shutdown after 5 minutes of idle time. Automatic reverse function for easy resolution of jams caused by paper overload. Can manage credit cards & CDs. 2 X 2 collection system consisting of a 100 litres container for paper and a 45 litres container for CDs for eco-friendly elimination of waste. Double high-capacity hardened cardboard waste container. Full bin indicator. Removable paper container. Exclusive design with wooden cabinet and castors. Low noise level (< 55 db) via Silentec system. Working width: 265 mm (paper) & 125 mm (CDs). Shredding speed: 230 mm/sec. **Automatic oiling system.** Cutting blade warranty: 2 years. CE-certified.



Dimensions (L x W x H): 660 x 560 x 1050 mm  
Weight: 90 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume in litres	Motor power in Watts	Ref. no.	RRP
intimus 175 hybrid	0.8 x 4.5	Particles	10 9	P-7/O-6	  	175 litres	1100	297761	ON REQUEST

## intimus 205















Professional shredder for office use. i-control control panel with clear and intuitive visual indicators for using the device. Automatic start / stop via photoelectric sensor. Easy visualisation of the paper load level by means of the DLS device with clear indicator lights. EcoLogic energy saving system with automatic shutdown after 5 minutes of idle time. Automatic reverse function for easy resolution of jams caused by paper overload. Can manage staples, clips & credit cards. High-capacity hardened cardboard waste container. Full bin indicator. Removable paper container. Exclusive design with wooden cabinet and castors. Low noise level (< 55 db) via Silentec system.. Working width: 405 mm. Shredding speed: 120-230 mm/sec. Cutting blade warranty: 30 years (2 years for P6 & P7). CE-certified.



**Model intimus 205 is available with automatic oiler (AO).**

Dimensions (W x D x H): 660 x 560 x 1160 mm.  
Weight: 93 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 205 SP2	5,8	Strips	70 60	P-2/T-2	 	205 litres	1100	297311	ON REQUEST
intimus 205 CP4	4 x 40	Particles	50 43	P-4/F-1/T-4	 	205 litres	1100	297331	ON REQUEST
intimus 205 CP5	1.9 x 15	Particles	30 26	P-5/F-2/T-5	 	205 litres	1100	297341	ON REQUEST
intimus 205 CP6	0.8 x 12	Particles	17 15	P-6/F-3		205 litres	1100	297351	ON REQUEST
intimus 205 CP7	0.8 x 4.5	Particles	10 9	P-7/F-3		205 litres	1100	297361	ON REQUEST
intimus 205 CP4 AO	4 x 40	Particles	50 43	P-4/F-1/T-4	 	205 litres	1100	297431	ON REQUEST
intimus 205 CP5 AO	1.9 x 15	Particles	30 26	P-5/F-2/T-5	 	205 litres	1100	297496	ON REQUEST
intimus 205 CP6 AO	0.8 x 12	Particles	17 15	P-6/F-3		205 litres	1100	297451	ON REQUEST
intimus 205 CP7 AO	0.8 x 4.5	Particles	10 9	P-7/F-3		205 litres	1100	297461	ON REQUEST

## Shredders





### intimus 200 CP5

Heavy-duty shredder for office use. Automatic ON/OFF of the device via a photoelectric sensor. Control panel with clear and intuitive touch-sensitive visual indicators for using the device. Automatic roll-back control in case of paper overload. Can manage staples, clips & credit cards. Full bin indicator. Exclusive design with metal cabinet and castors. Low noise level (75 db). Working width: 444 mm (Horizontal A4 feed). Paper holder. Shredding speed: 300 mm/sec. Cutting blade warranty: 3 years. CE-certified.

**Model intimus 200 CP5 is available with automatic oiler (AO).**

Dimensions (W x D x H): 750 x 550 x 1280 mm.  
Weight: 185 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup> 180 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 200 CP5	1.9 x 15	Particles	40	38	P-5/F-2	 	200 litres	3900	648101	ON REQUEST
intimus 200 CP5 AO	1.9 x 15	Particles	40	38	P-5/F-2	 	200 litres	3900	648201	ON REQUEST













### intimus H200 CP4 / VS

Heavy-duty shredder for office use with upper hopper. Automatic ON/OFF of the device via a photoelectric sensor. Control panel with clear and intuitive touch-sensitive visual indicators for using the device. Automatic roll-back control in case of paper overload. Can manage staples, clips & credit cards. Full bin indicator. Exclusive design with metal cabinet and castors. Low noise level (56/48-69 db). Working width: 444 mm (Horizontal A4 feed). Paper holder. Shredding speed: 240 mm/sec. (Mod. CP) & 360 mm/sec. (Mod. VS). Cutting blade warranty: 3 years. CE-certified.

**Model intimus H200 CP4 is available with automatic oiler (AO).**

Dimensions (W x D x H): 750 x 550 x 1800 mm.  
Weight: 201 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup> 180 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Also shreds	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus H200 CP4	3.8 x 40	Particles	80	75	P-4/F-1/O-3/T-4	   	200 litres	3900	649101	ON REQUEST
intimus H200 CP4 AO	3.8 x 40	Particles	80	75	P-4/F-1/O-3/T-4	   	200 litres	3900	649201	ON REQUEST
intimus H200 CP4 VS	3.8 x 40	Particles	70	65	P-4/F-1/O-3/T-4	   	200 litres	2900	685201	ON REQUEST

## intimus 007 SE / SF /SL

High-security, heavy-duty shredder for office use. Automatic start/stop of the device by means of a photoelectric cell equipped with a micro counter. Control panel with clear and intuitive illuminated indicators for sleep mode, full paper bin, open door and paper jam. Available with automatic oiler. Fully removable high-capacity hardened cardboard bin with sliding mechanism for easy disposal of shredded waste. Exclusive design with metal cabinet and castors. Low noise level (70 db). Working width: 300 mm (Horizontal A4 feed). Paper holder. Shredding speed: 230 mm/sec (SE & SF) and 100 mm/sec (SL). Cutting blade warranty: 2 years. CE-certified.







**Model intimus 007 is available with automatic oiler (AO).**

Dimensions (W x D x H): 700 x 550 x 1115 mm.

Weight: 142 kg. (007 SE-SF)

Weight: 170 kg. (007 SL)



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 007 SE	0.7 x 9.5	Particles	14 12	P-6		190 litres	1900	17022	ON REQUEST
intimus 007 SE AO	0.7 x 9.5	Particles	14 12	P-6		190 litres	1900	17072	ON REQUEST
intimus 007 SF	0.8 x 4.5	Particles	10 9	P-7/O-3		190 litres	1900	694211	ON REQUEST
intimus 007 SF AO	0.8 x 4.5	Particles	10 9	P-7/O-3		190 litres	1900	694271	ON REQUEST
intimus 007 SL	0.65 x 1.5	Particles	12 10	P-7		190 litres	1900	689111	ON REQUEST
intimus 007 SL AO	0.65 x 1.5	Particles	12 10	P-7		190 litres	1900	689171	ON REQUEST

## intimus PacMaster

Cardboard shredder for making useful and durable packaging material. Easy amortisation for centres that frequently receive and send parcels. Simple, reliable and robust metal construction for intensive use in the packaging warehouse. ON/OFF safety switch / emergency stop button. Guide rail on the work surface to ensure precise cutting of the cardboard and to adapt the padded panels to the desired format as required. Cutter feed width/height: 425 mm / 15 mm. Available as Vario-Speed (VS) version: drive concept optimizes the working speed depending on the shred load. Thanks to this feature it can be operated on a 230V socket outlet. CE-certified.

Dimensions (W x D x H): 690 x 470 x 950 mm.

Weight Model S: 176 kg.

Weight Model VS: 185 kg.



Model	Fill material (mm)	Shredding capacity	Cardboard	Speed	Ref. no.	RRP
PacMaster S	4 x 110	5-7 m <sup>3</sup> /h	2-3 layers	18 mm/s	347901	ON REQUEST
PacMaster VS	4 x 110	7-11 m <sup>3</sup> /h	3 layers	9-29 mm/s	347971	ON REQUEST

## Shredders

### intimus 14.95





Industrial shredder with heavy-duty conveyor belt. Shredding capacity: up to 165 sheets. Clear and intuitive control panel. Auto Start - Stop - Restart. Automatic roll-back control in case of paper overload. Wide 440 mm input tray for convenient, fast and safe loading. Destroys CDs, creased paper and credit cards in a single go. Large removable container located below the cutting mechanism. Full bin indicator with auto stop. Reduced device width (80 cm) to fit through most standard doors. Low noise level (68 db). Castors for convenient manoeuvring. Left-opening version (optional). Shredding speed: 280/300 mm/sec. Cutting blade warranty: 5 years (P1&P2), 3 years (P3 & P4). 3-Phase machine. CE-certified.



**Model intimus 14.95 is optional available with automatic oiler.**

Dimensions (W x D x H): 1680 x 800 x 1640 mm.  
Weight: 435 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 14.95	11.8	Strips	190 165	P-1/O-1/T-2/E-2		200 litres	4000	698911	ON REQUEST
intimus 14.95	5.8	Strips	140 120	P-2/O-2/T-2/E-2		200 litres	4000	698901	ON REQUEST
intimus 14.95	6 x 50	Particles	140 120	P-3/O-2/T-3/E-2		200 litres	4000	698921	ON REQUEST
intimus 14.95	3.8 x 40	Particles	110 95	P-4/F-1/O-3/T-4/E-3		200 litres	4000	698931	ON REQUEST



### intimus 16.50 SmartShred

Industrial shredder with heavy-duty conveyor belt. Shredding capacity: up to 450 sheets. Clear and intuitive touchscreen. Auto Start - Stop - Restart. Automatic roll-back control in case of paper overload. Wide 500 mm input tray for convenient, fast and safe loading. Destroys A-Z folders (P2), CDs, creased paper and credit cards in a single go. Comes standard with an automatic smart oiler. Large removable container located below the cutting mechanism. Full bin indicator with auto stop. Low noise level (61 db). Shredding speed: 240 mm/sec. Cutting blade warranty: 5 years (P2), 3 years (P3). 3-Phase machine. CE-certified.



Dimensions (W x D x H): 1200 x 1950 x 1550 mm.  
Weight: 726 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>	Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 16.50	10 x 70	Particles	520 450	P-2/O-2/T-2/E-2		450 litres	7500	655141	ON REQUEST
intimus 16.50	6 x 50	Particles	330 290	P-3/O-2/T-3/E-2		450 litres	7500	655121	ON REQUEST



## intimus 14.87



Industrial high-capacity shredder with baling press. The shredded material is compacted to reduce its volume by up to 70%. Heavy-duty conveyor belt. Clear and intuitive control panel. Auto Start - Stop - Restart. Automatic roll-back control in case of paper overload. Wide 440 mm input tray for convenient, fast and safe loading. Destroys CDs, creased paper and credit cards in a single go. Shreds and compacts the shredded material into bundles simultaneously. Push button control for bundle extraction. The compaction process starts automatically. 'Bundle / bale complete' indicator with cutting process interruption. Double strapping to guarantee bundle stability. Reduced device width (80 cm) to fit through most standard doors. Low noise level (63 db). Castors for convenient manoeuvring. Possibility to feed the compactor directly/manually. Shredding speed: 300/235 mm/sec. Cutting blade warranty: 3 years. 3-Phase machine. CE-certified.



**Model intimus 14.87 is optional available with automatic oiler.**

Dimensions (W x D x H): 800 x 2680/3270 x 1640 mm.  
Weight: 965 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 14.87	6 x 50	Particles	140	120	P-3/O-2/T-3/E-2			4000	699921	ON REQUEST
intimus 14.87	3.8 x 40	Particles	110	95	P-4/F-1/O-3/T-3/E-3			4000	699931	ON REQUEST



## intimus 16.86 SmartShred

Industrial high-capacity shredder with baling press. The shredded material is compacted to reduce its volume by up to 70%. Heavy-duty conveyor belt. Clear and intuitive touchscreen. Auto Start - Stop - Restart. Automatic roll-back control in case of paper overload. Wide 440 mm input tray for convenient, fast and safe loading. Destroys A-Z folders (P2), CDs, creased paper and credit cards in a single go. Comes standard with an automatic smart oiler. Shreds and compacts the shredded material into bundles simultaneously. The compaction process starts automatically. 'Bundle / bale complete' indicator with cutting process interruption. Double strapping to guarantee bundle stability. Low noise level (61 db). Possibility to feed the compactor directly/manually. Shredding speed: 240 mm/sec. Cutting blade warranty: 5 years (P2), 3 years (P3). 3-Phase machine. CE-certified.



Dimensions (W x D x H): 2830/3420 x 1200 x 1500 mm.  
Weight: 1256 kg.



Model	Cutting size (mm)	Cutting type	No. of sheets (A4) 70 g/m <sup>2</sup>   80 g/m <sup>2</sup>		Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus 16.86	10 x 70	Particles	520	450	P-2/O-2/T-2/E-2			7500	656141	ON REQUEST
intimus 16.86	6 x 50	Particles	330	290	P-3/O-2/T-3/E-2			7500	656121	ON REQUEST

## intimus FlashEx

Destroys multimedia and digital devices in office environments in real time. The FlashEx has a solid cutting head which grabs the material with specially designed claw like cutting cylinders pulling material into the unit. This allows you to insert USB thumb drives, smartphones, mobile phones, mini tablets and CDs. All the material is destroyed into particles of 4 x 15 mm. “i-control” guarantees great ease of use, giving the user total control by allowing them to safely place the material in the feed and verify that it is fully destroyed. Feed width: 165 mm. Shredding capacity: approx. 100 mobile phones / 500 USB thumb drives per hour. CE-certified.



Dimensions (W x D x H): 580 x 610 x 980 mm.  
Weight: 116 kg.



Model	Cutting size (mm)	Cutting type	Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus FlashEx	4 x 15	Particles	O-3/T-4/E-3		25 litres	1100	176101	ON REQUEST

## intimus 240 Crusher

The intimus 240 meets evolving technology challenges by increasing the speed and amplifying the crushing power. HDDs are bent by the crusher. Best to combine with degaussing for a full solution for high security requirements. Security level H3 for standalone application. Destroys all kind of hard drives regardless of size, operating system or interface. Easy to use. Bends, breaks, and mangles hard drives, including dataplatters and other internal components, preventing data recovery. The lightest electric destroyer on the market. CE-certified.



Dimensions (W x D x H): 360 x 180 x 430 mm.  
Weight: 33 kg.

Model	Security level DIN 66399	Destruction Time	Power consumption	Ref. no.	RRP
intimus 240 Crusher	H-3	1440 hard drives (6.4 cm)/hour 240 hard drives (8.9 cm)/hour	Standby mode: 90 W During crushing: 1920 W	348101	ON REQUEST

## intimus 360 Destroyer

Fast and easy to operate. Included on the NSA/CSS-evaluated products list. Destroys solid-state media, flash drives, USB thumb drives, and SSHD controller boards when used with the intimus SSD Destroyer. The intimus Destroyer meets evolving technology challenges by increasing the speed and amplifying the crushing power. HDDs are bent by the crusher. Best to combine with degaussing for a full solution for high security requirements. Security level H3 for standalone application. CE-certified.



Dimensions (W x D x H): 191 x 473 x 378 mm.  
Weight: 36 kg.

Model	Security level DIN 66399	Destruction Time	Power consumption	Ref. no.	RRP
intimus 360 Destroyer	H-3/E-1*	1800 hard drives (6.4 cm)/hour 360 hard drives (8.9 cm)/hour	Standby mode: 90 W During crushing: 1200 W	348701	ON REQUEST

\* SSD-HDD only

### intimus 8000S Degausser

When degaussing, the storage media are flooded with a very strong magnetic field that far exceeds their own magnetic force, the coercivity of the hard disk. The short and strong pulse erases the data on the hard disk irrevocably. Degaussing is characterised above all by the simple operation and minimal space requirements, which also allows for its use in an office environment. NATO-listed. Clean and quiet solution for sanitising magnetic media. Single pass pulse technology. Fast sliding feed solution for destroying hard drives individually or in batches. Internal verification of magnetic field. Control panel. Protected against external magnetic influences. Optional Auditor pro to generate a certificate of erasure and destruction. CE-certified.



Dimensions (W x D x H): 151 x 45 x 337 mm.  
Weight: 15.5 kg.

Model	Power supply	Duty cycle	Magnetic field	Ref. no.	RRP
intimus 8000S	100-240 VAC, 50/60 Hz	7 sec	10,000 Gauss, 1 Tesla	349771	ON REQUEST
<b>Accessories</b>	Auditor-Pro for intimus 8000S Degausser			349990	ON REQUEST

### intimus 9000 Degausser

When degaussing, the storage media are flooded with a very strong magnetic field that far exceeds their own magnetic force, the coercivity of the hard disk. The short and strong pulse erases the data on the hard disk irrevocably. Degaussing is characterised above all by the simple operation and minimal space requirements, which also allows for its use in an office environment. NATO-listed. Clean and quiet solution for sanitising magnetic media. Single pass pulse technology. Fast sliding feed solution for destroying hard drives individually or in batches. Internal verification of magnetic field. Control panel. Protected against external magnetic influences. Optional Auditor pro to generate a certificate of erasure and destruction. CE-certified.



Dimensions (W x D x H): 580 x 310 x 480 mm.  
Weight: 25 kg.

Model	Power supply	Duty cycle	Magnetic field	Ref. no.	RRP
intimus 9000 Degausser	100-240 VAC, 50/60 Hz	6 sec	10,000 Gauss, 1 Tesla	349201	ON REQUEST
<b>Accessories</b>	Auditor-Pro for intimus 9000 Degausser			349993	ON REQUEST

## intimus 20000 S Auditor-Pro Degausser

A short and strong pulse erases the data on the hard disk irrevocably. Simple operation. Floods the media with a very strong magnetic field. NSA (NSA/CSS EPL-912A-E)-approved. Clean and quiet solution for sanitising magnetic media. Single pass pulse technology. Drawer feeding solution. Information display. Internal verification of magnetic field. Generates Auditor-Pro erasure report with images for audit compliance. Creates a secure erasure verification process. Provides proof data is completely eliminated. Integrated handles. CE-certified.

**NEW**



Dimensions (W x D x H): 430 x 248 x 629 mm.  
Weight: 48 kg.

Model	Power supply	Duty cycle	Magnetic field	Ref. no.	RRP
intimus 20000 S Auditor-Pro	90-250 VAC, 50-60 Hz	15 sec	20,000 Gauss, 2 Tesla	ON REQUEST	ON REQUEST

## intimus HDD Gladiator

Industrial high-performance shredder for optical and magnetic media. Fast, reliable and easy to use. Clear ON/OFF and reverse buttons. Specially hardened blades. Maximum operator safety. Lockable master switch. Shredded material collected in standard 120-litre waste bin. Automatic roll-back in case of overload. To ensure maximum performance, the hard drives are fed into the chute on the left which uses 30-mm blades specially designed for hard drives. The chute on the right is used for optical media, SSD, VHS, tape drives, etc. It uses 12-mm blades specially designed for lightweight supports. 3-Phase machine. CE-certified.

Dimensions (W x D x H): 1042 x 840 x 1679 mm.  
Weight: 540 kg.



Model	Actual output	Security level DIN 66399 (ISO/IEC 21964)	Shreds also	Bin volume	Motor power in Watts	Ref. no.	RRP
intimus HDD Gladiator	Up to 500	O-2/T-2/H-3/E-2	   	120 litres	3500	555701	ON REQUEST

## Shredder Consumables



### SHREDDER BAGS

We have different bag sizes for shredders. Choose a bag suitable for the volume of your waste bin. Maximum tear strength.



### BAG SEALERS

These sealers allow you to take maximum advantage of the space of your bag, taking up little space for closing the bag correctly and enabling you to close the bag without any effort.



### OIL 110 ML

Can be used for any shredder. Very easy to use. The oil is sprinkled onto 2-3 paper sheets which are then destroyed. It is not recommended to sprinkle the oil directly onto the blades.



### OIL 2 LITRES

The 2-litre oil bottles are designed for shredders with automatic oiling. It is important to always keep a spare bottle on hand to ensure proper lubrication of the machine.



### OIL 5 LITRES

The 5-litre oil bottles are designed for high-performance equipment. Correct lubrication of the cutting heads guarantees a longer cutting head life.

#### Lubricating oil for all commercially available shredders

	Ref. no.	RRP
intimus LUBRICATING OIL 110 ml	88035	ON REQUEST
intimus LUBRICATING OIL 2 litres	94777	ON REQUEST
intimus LUBRICATING OIL 5 litres	80180	ON REQUEST

#### Shredder bags

	Ref. no.	RRP
intimus MODELS: 007 SX, 130, 175, 175 hybrid (only for paper receptacle), 211, 220, 222, 314, 316, 385 SE, 420, 422, 424, 430, 433, 434, 452, 600, 602, 702, PacMate, TAROS 007 S, 007 SX, 31.99, 45.20, 50.34, 60.10, 60.20	99952	ON REQUEST
intimus MODELS: 205, 007 SE, 007 SF, 007 SL, 205, 444 with cardboard receptacle, S 16.77 K, 304, 306, 405, 406, 407, 421, 431 TAROS 50.55/50.66 with cardboard receptacle, 50.33, 31.90, 51.30 Taifun Master, Senior, Boss	99954	ON REQUEST
intimus MODELS: 16.50, 15.90, 14.90 (w/o baler), 16.50, 15.90, 14.90 VibroCompactor (w/o baler), 550 SE, 1550 SE, 490 SE (w/o baler)	99960	ON REQUEST
intimus MODELS: 14.95, 14.84, 14.87, 15.85, 16.86, VZ 14.00, Baler 840, 850, 860, 870	99969	ON REQUEST
intimus MODELS: 20, 26, 32, 38, 50, 60, 90, 100, 120, 175 hybrid (only for CD receptacle), FlashEx, 250, 280, 300, 302, 400, 402, 388, 390, 500, 501, 502, 1000, 2000, 2500, 3000, 5000, Simplex, S 608, S10.06, MultiMedia, TAROS 30.55, 31.80, 50.10, 51.10, 50.20, Taifun 1100, 1200	99977	ON REQUEST
intimus MODELS: 200, H200, 444 with metal sliding framen, 802, 852	80946	ON REQUEST
intimus MODELS: DIXI 800, Shredder/baler combination intimus 490 CC, CC 580 SE, Shredder/baler combination Taifun CC 1490, CC 1580	99928	ON REQUEST
intimus MODELS: 45, 302 Printer cabinet	83079	ON REQUEST
intimus MODELS: Dust extractor Mobil Jet 100, 120	79148	ON REQUEST

#### Waste bag sealers

	Ref. no.	RRP
ROLL OF BAG SEALERS FOR intimus SHREDDERS 14.84, 14.87, 15.85, 16.86, VZ 14.00	80661	ON REQUEST
ROLL OF BAG SEALERS FOR intimus SHREDDERS CC 580 SE, CC 1580, DIXI 15 S, 16 S & 18 S	80662	ON REQUEST
ROLL OF BAG SEALERS FOR intimus SHREDDERS DIXI 20 SL, 25 SL, 39 S, 50 SL, 61 S	80804	ON REQUEST

#### Receptacles

	Ref. no.	RRP
Receptacle for intimus 130	79299	ON REQUEST
Receptacle for intimus 175	85829	ON REQUEST
Receptacle for intimus 007 SE, 007 SF, 007 SL	75987	ON REQUEST
Receptacle for intimus 175 hybrid (Paper)	94478	ON REQUEST
Receptacle for intimus 175 hybrid (CD)	94477	ON REQUEST
Receptacle for intimus 205	95603	ON REQUEST
Receptacle for intimus FlashEx	93933	ON REQUEST

## Paper trimmers

### intimus 260 & 320

Rotary trimmer with metal base and reinforced plastic end pieces. Ergonomic safety cutting head with hardened steel blade. Transparent and automatic fastening clamp. Anti-scratch powder coating. Extendable frame with scale in millimetres and inches. Guide with alignment markings on the clamping bar and cutting board for precise angular cuts. Ruler in cm and inches on the cutting table. Robust and shock-resistant construction. CE and GS certified.

Dimensions 260 (W x D x H): 445 x 200 x 70 mm.

Weight: 1.5 kg.

Dimensions 320 (W x D x H): 505 x 200 x 70 mm.

Weight: 1.7 kg.



Model	Cutting length	Cutting capacity Sheets (70-80 g/m <sup>2</sup> )	Table size (L x W)	Ref. no.	RRP
intimus 260	(A4) 260 mm	13-10	260 x 170 mm	INT-CU-0000260	ON REQUEST
intimus 320	(A3) 320 mm	13-10	320 x 170 mm	INT-CU-0000320	ON REQUEST

### intimus 460

Rotary trimmer with metal base and reinforced plastic end pieces. Ergonomic safety cutting head with hardened steel blade. Transparent and automatic fastening clamp. Anti-scratch powder coating. Extendable frame with scale in millimetres and inches. Guide with alignment markings on the clamping bar and cutting board for precise angular cuts. Ruler in cm and inches on the cutting table. Robust and shock-resistant construction. CE and GS certified.

Dimensions (W x D x H): 645 x 200 x 70 mm.

Weight: 2.2 kg.



Model	Cutting length	Cutting capacity Sheets (70-80 g/m <sup>2</sup> )	Table size (L x W)	Ref. no.	RRP
intimus 460	(A4+) 460 mm	12-8	460 x 170 mm	INT-CU-0000460	ON REQUEST

### intimus 670

Rotary trimmer with metal base and reinforced plastic end pieces. Ergonomic safety cutting head with hardened steel blade. Transparent and automatic fastening clamp. Anti-scratch powder coating. Extendable frame with scale in millimetres and inches. Guide with alignment markings on the clamping bar and cutting board for precise angular cuts. Ruler in cm and inches on the cutting table. Robust and shock-resistant construction. CE and GS certified.

Dimensions (W x D x H): 855 x 200 x 70 mm.

Weight: 2.7 kg.



Model	Cutting length	Cutting capacity Sheets (70-80 g/m <sup>2</sup> )	Table size (L x W)	Ref. no.	RRP
intimus 670	(A2) 670 mm	12-8	670 x 170 mm	INT-CU-0000670	ON REQUEST

## intimus 960 & 1260

Rotary trimmer with large and solid all-metal support frame. High-quality resharpenable blades. Metallic base structure with reinforced plastic end pieces. Ergonomic safety cutting head with hardened steel blade. Transparent and automatic fastening clamp. Anti-scratch powder coating. Extendable frame with scale in millimetres and inches. Guide with alignment markings on the clamping bar and cutting board for precise angular cuts. Ruler in cm and inches on the cutting table. Robust and shock-resistant construction. CE and GS certified.

Dimensions 960 (W x D x H): 1145 x 200 x 70 mm.  
 Weight: 5.3 kg.  
 Dimensions 1260 (W x D x H): 1445 x 200 x 70 mm.  
 Weight: 6.8 kg.




**intimus 960 & 1260**  
are available with an optional stand.

Model	Cutting length	Cutting capacity Sheets (70-80 g/m <sup>2</sup> )	Table size (L x W)	Ref. no.	RRP
intimus 960	(A1) 960 mm	7-5	960 x 170 mm	INT-CU-0000960	ON REQUEST
intimus 1260	(A0) 1,260 mm	7-5	1260 x 170 mm	INT-CU-0001260	ON REQUEST
Accessories	intimus 960 TRIMMER STAND			INT-CU-000960ST	ON REQUEST
	intimus 1260 TRIMMER STAND			INT-CU-001260ST	ON REQUEST

## intimus 331 & 451

Lever trimmer with large and solid all-metal support frame. High-quality resharpenable blades made of hardened steel. Transparent, fixed blade protection with integrated cutting line indicator for precise alignment of the paper to be cut. Precision side stop and adjustable rear frame. Manual fastening clamp. Cutting thickness: 3 mm. Measuring scale in mm / inches. CE and GS certified.

Dimensions 331 (W x D x H): 554 x 286 x 440 mm.  
 Weight: 3.2 kg.  
 Dimensions (W x D x H): 674 x 372 x 510 mm.  
 Weight: 4.8 kg.

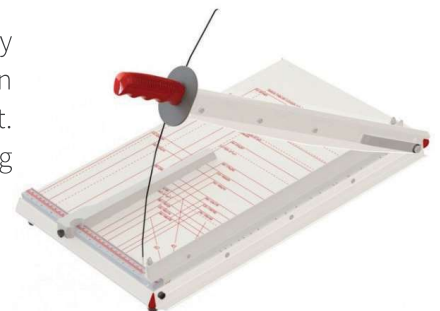

Model	Cutting length	Cutting capacity Sheets (70-80 g/m <sup>2</sup> )	Table size (L x W)	Ref. no.	RRP
intimus 331	330 mm	24-20	330 x 245 mm	INT-CU-0000331	ON REQUEST
intimus 451	450 mm	24-20	450 x 332 mm	INT-CU-0000451	ON REQUEST

## intimus 363

Lever trimmer with automatic piston for a precise and comfortable cut. Large and solid all-metal support frame. High-quality resharpenable blades made of hardened steel. Transparent, fixed blade protection with integrated cutting line indicator for precise alignment of the paper to be cut. Precision side stop and adjustable rear frame. Cutting thickness: 3 mm. Measuring scale in mm / inches. CE and GS certified.

Dimensions (W x D x H): 612 x 310 x 410 mm.  
 Weight: 5.3 kg.



Model	Cutting length	Cutting capacity Sheets (70-80 g/m <sup>2</sup> )	Table size (L x W)	Ref. no.	RRP
intimus 363	360 mm	35-30	360 x 270 mm	INT-CU-0000363	ON REQUEST

## Paper trimmers

### intimus 440 C

Lever trimmer with automatic piston for a precise and comfortable cut. Large and solid all-metal support frame. High-quality resharpenable blades made of hardened steel. Transparent, fixed blade protection with integrated cutting line indicator for precise alignment of the paper to be cut. Precision side stop and adjustable rear frame. Cutting thickness: 4 mm. Measuring scale in mm / inches. CE and GS certified.

Dimensions (W x D x H): 685 x 395 x 500 mm.  
Weight: 10.6 kg.



Model	Cutting length	Cutting capacity Sheets (70-80 g/m <sup>2</sup> )	Table size (L x W)	Ref. no.	RRP
intimus 440 C	440 mm	40-35	440 x 354 mm	INT-CU-000440C	ON REQUEST

### intimus 560 S

Lever trimmer with automatic piston for a precise and comfortable cut. Large and solid all-metal support frame. High-quality resharpenable blades made of hardened steel. Transparent, fixed blade protection with integrated cutting line indicator for precise alignment of the paper to be cut. Precision side stop and adjustable rear frame. Cutting thickness: 5 mm. Measuring scale in mm / inches. CE and GS certified.

Dimensions (W x D x H): 835 x 495 x 525 mm.  
Weight: 15 kg.



Model	Cutting length	Cutting capacity Sheets (70-80 g/m <sup>2</sup> )	Table size (L x W)	Ref. no.	RRP
intimus 560 S	560 mm	45-40	560 x 455 mm	INT-CU-000560S	ON REQUEST

### intimus 710

Lever trimmer with automatic piston for a precise and comfortable cut. Large and solid all-metal support frame. High-quality resharpenable blades made of hardened steel. Transparent, fixed blade protection with integrated cutting line indicator for precise alignment of the paper to be cut. Precision side stop and adjustable rear frame. Cutting thickness: 3/5 mm. Measuring scale in mm / inches. CE and GS certified.

Dimensions (W x D x H): 1000 x 615 x 605 mm.  
Weight: 25.1 kg.



**intimus 710**  
is available with an optional stand.

Model	Cutting length	Cutting capacity Sheets (70-80 g/m <sup>2</sup> )	Table size (L x W)	Ref. no.	RRP
intimus 710	710 mm	28-25	710 x 557 mm	INT-CU-0000710	ON REQUEST
Accessories	intimus 710 TRIMMER STAND			INT-CU-00710ST	ON REQUEST



## Guillotines

### intimus 3115 M

Safe and precise cutting of up to 150 sheets for office environments. LED optical cutting line for easy visibility and precision in the cutting area. Automatic paper fastening clamp. Easy rotation and change of the cutting stick / mat. Scale for precise cutting adjustment in centimetres and inches. CE-certified.

Dimensions: 460 x 450 x 400 mm.  
Weight: 15 kg.



Model	Cutting length	Cutting height	Narrow cut	Cutting depth	Ref. no.	RRP
intimus 3115 M	310 mm	15 mm	40 mm	254 mm	INT-GU-003115M	ON REQUEST

### intimus 4340 M

Safe and precise cutting of up to 400 sheets for office environments, copy shops, digital printing centres and photography centres. LED optical cutting line for easy visibility and precision in the cutting area. Manual paper fastening clamp. Transparent safety cover at the back of the table. Blade lock in upper position. Easy-to-change blade from the front of the machine without having to remove the covers. Easy and safe access, rotation and change of the cutting stick from the side of the machine. Blade depth adjustment from the outside of the machine. Resharpenable blade made of high-quality steel. Scale for precise trim adjustment in centimetres and inches. Optional stand available. CE-certified.

Dimensions (W x D x H): 400 x 870 x 800 mm.  
Weight: 55 kg.



Model	Cutting length	Cutting height	Narrow cut	Cutting depth	Ref. no.	RRP
intimus 4340 M	430 mm	40 mm	40 mm	430 mm	INT-GU-004340M	ON REQUEST
Accessories	Stand for guillotine intimus 4340 M				INT-GU-004340ST	ON REQUEST

### intimus 4980 D

Safe and precise cutting of up to 750 sheets for office environments, copy shops, digital printing centres and photography centres. LED optical cutting line for easy visibility and precision in the cutting area. Manual paper fastening clamp. Oscillating safety cover on the front of the table (safety cut-out during cutting). Transparent safety cover at the back of the table. Blade lock in upper position. Easy blade replacement from the front of the machine without having to remove the covers. Easy and safe access, rotation and change of the cutting stick from the side of the machine. Blade depth adjustment from the outside of the machine. Resharpenable blade made of high-quality steel. DIGITAL LCD scale for precise trim adjustment in centimetres and inches. Optional stand available. CE-certified.

Dimensions (W x D x H): 590 x 1000 x 890 mm.  
Weight: 90 kg.



Model	Cutting length	Cutting height	Narrow cut	Cutting depth	Ref. no.	RRP
intimus 4980 D	485 mm	75 mm	30 mm	465 mm	INT-GU-004980D	ON REQUEST
Accessories	Stand for guillotine intimus 4980 D				INT-GU-004980ST	ON REQUEST

## Guillotines

### intimus 4540 EP

Electric guillotine for safe and precise cutting of up to 400 sheets for office environments, copy shops, digital printing centres and photography centres. LED optical cutting line for easy visibility and precision in the cutting area. Automatic paper fastening clamp. Oscillating safety cover on the front of the table (safety cut-out during trimming). Transparent safety cover on the back of the table. Blade lock in upper position. Easy blade replacement from the front of the machine without having to remove the covers. Easy and safe rotation and change of the cutting stick from the side of the machine. Blade depth adjustment from the outside of the machine. Resharpenable blade made of high-quality steel. DIGITAL TOUCH SCREEN display with presets for the most common cut settings (A3, A4, A5 & A6) for quick, easy and precise cut size adjustment in centimetres and inches. Handwheel adjustment, digital trim size control. Memory for up to 99 programmes/tasks. Optional stand available. CE-certified.

Dimensions: 382 x 688 x 755 mm.  
Weight: 104 kg.



Model	Cutting length	Cutting height	Narrow cut	Cutting depth	Ref. no.	RRP
intimus 4540 EP	450 mm	40 mm	50 mm	450 mm	INT-GU-04540EP	ON REQUEST
Accessories	BASE TABLE FOR GUILLOTINE intimus 4540 EP				INT-GU-04540ST	ON REQUEST

### intimus 4880 & 6680 EPS

Electric guillotine for safe and precise cutting of up to 800 sheets for office environments, copy shops, digital printing centres and photography centres. LED optical cutting line for easy visibility and precision in the cutting area. Automatic paper fastening clamp. Safe, two-handed cutting. Infrared safety photocell with metal protection on the front of the table (automatic shut-off during cutting in case of access). Easy blade replacement from the front of the machine without having to remove the covers. Easy and safe access, rotation and change of the cutting stick from the side of the machine. Blade depth adjustment from the outside of the machine. Resharpenable blade made of high-quality steel. DIGITAL TOUCH SCREEN display with presets for the most common cut settings (A3, A4, A5 & A6) for quick, easy and precise cut size adjustment in centimetres and inches. Handwheel adjustment for electric / digital cut size management. Memory for up to 99 programmes/tasks. Robust and stable motor, brake, clamp and blade. Stand included. Optional side tables available. CE-certified.

Dimensions 4880 (W x D x H): 780 x 860 x 1260 mm.  
Weight 4880: 240 kg.  
Dimensions 6680 (W x D x H): 1020 x 1250 x 1250 mm.  
Weight 4880: 331 kg.



Model	Cutting length	Cutting height	Narrow cut	Cutting depth	Ref. no.	RRP
intimus 4880 EPS	480 mm	80 mm	25 mm	450 mm	INT-GU-4880EPS	ON REQUEST
intimus 6680 EPS	660 mm	80 mm	35 mm	610 mm	INT-GU-6680EPS	ON REQUEST
Accessories	Side tables for guillotine intimus 4880 EPS				INT-GU-04880ML	ON REQUEST
	Side tables for guillotine intimus 6680 EPS				INT-GU-06680ML	ON REQUEST

**intimus 5280 EPSH**

Professional hydraulic guillotine with optional side tables for a more efficient work flow. Cuts easily paper stacks of up to 800 sheets. Suitable for high-volume use in copy shops, digital printing houses or book binderies.

The touch pad allows to control the electrical backgauge or to select easily preprogrammed settings for the most common formats (A3, A4, A5, A6). Up to 99 individual programs with 10 steps in each program can be stored on the memory. Knife fine depth adjustments can either be done via the touch pad or manually from the outside. The LED optical cutting line guarantees easy alignment of cutting marks for precise cuts. The electronic hand wheel facilitates manual backgauge positioning, accurate to the millimeter at variable speed.

The safety light beam in the working area ensures the highest level of safety, automatic shut-off in case of access. Two-hand operation. Safe and easy knife change with a knife changing device. Optional side tables available. CE-certified.



Dimensions: 946 x 1300 x 1396 mm.  
Weight: 330 kg.

Model	Cutting length	Cutting height	Narrow cut	Cutting depth	Ref. no.	RRP
intimus 5280 EPSH	520 mm	80 mm	15 mm	580 mm	INT-GU-5280EPSH	ON REQUEST
<b>Accessories</b>	Side tables for guillotine intimus 5280 EPSH				INT-GU-05280ML	ON REQUEST

**intimus 5280 EPSH POWERCUT**

Compact, sturdy and automated hydraulic guillotine with robust metal construction. Equipped with fully hydraulic knife and clamp the guillotine is able to cut easily paper stacks of up to 800 sheets. Optional side tables allow a more efficient work flow. Suitable for high-volume use in copy shops, digital printing houses or book binderies.

The user-friendly, fully programmable 4" touch screen with 100 individual programs with 100 steps in each program offers high flexibility and accuracy. Additional business card cutting mode integrated. 9 different languages as a standard, other available as option. The LED optical cutting line indicator guarantees easy alignment of cutting marks for precise cuts. The electronic hand wheel facilitates manual backgauge positioning, accurate to the millimeter at variable speed.

IR safety curtain on the front table, safety cover on the rear table and automatic knife and clamp return ensure the highest level of safety. Electronically controlled two-hand operation. Safe and easy knife change with a knife changing device. Optional side tables available. CE-certified.



Dimensions (WxDxH): 833x1230x1244 mm.  
Weight: 350 kg.

Model	Cutting length	Cutting height	Narrow cut	Cutting depth	Ref. no.	RRP
intimus 5280 EPSHP	520 mm	80 mm	22 mm	520 mm	INT-GU-05280EPSHP	ON REQUEST
<b>Accessories</b>	Side tables for guillotine intimus 5280 EPSHP				INT-GU-5280PML	ON REQUEST

## Guillotines

### intimus 7310 EPSH POWERCUT

Compact, sturdy and automated hydraulic guillotine with robust metal construction. Equipped with fully hydraulic knife and clamp the guillotine is able to cut easily paper stacks of up to 1000 sheets. Front and back air tables facilitate the work flow significantly. Suitable for heavy duty use in copy shops, digital printing houses or book binderies.

The user-friendly, fully programmable 7" touch screen with 100 individual programs with 100 steps in each program offers high flexibility and accuracy. Additional business card cutting mode integrated. 9 different languages as a standard, other available as option. The LED optical cutting line indicator guarantees easy alignment of cutting marks for precise cuts. The electronic hand wheel facilitates manual backgauge positioning, accurate to the millimeter at variable speed. IR safety curtain on the front table, safety cover on the rear table and automatic knife and clamp return ensure the highest level of safety. Electronically controlled two-hand operation. Safe and easy knife change with a knife changing device. Side tables included. CE-certified.



Dimensions: 1855 x 1755 x 1460 mm.

Weight: 600 kg.

Model	Cutting length	Cutting height	Narrow cut	Cutting depth	Ref. no.	RRP
intimus 7310 EPSHP	730 mm	100 mm	30 mm	730 mm	INT-GU-07310EPSHP	ON REQUEST

## Consumables for Trimmers & Guillotines

GUILLOTINE BLADES	Ref. no.	RRP
GUILLOTINE BLADE 3115 M	INT-GU-CON-30001	ON REQUEST
GUILLOTINE BLADE 4340 M	INT-GU-CON-30002	ON REQUEST
GUILLOTINE BLADE 4980 D	INT-GU-CON-30000	ON REQUEST
GUILLOTINE BLADE 4540 EP	INT-GU-CON-30003	ON REQUEST
GUILLOTINE BLADE 4880 EPS	INT-GU-CON-30004	ON REQUEST
GUILLOTINE BLADE 6680 EPS	INT-GU-CON-30007	ON REQUEST
GUILLOTINE BLADE 5280 EPSH	INT-GU-CON-30011	ON REQUEST
GUILLOTINE BLADE 5280 EPSH POWERCUT	INT-GU-CON-30010	ON REQUEST
GUILLOTINE BLADE 7310 EPSHP POWERCUT	INT-GU-CON-30009	ON REQUEST
Cutting sticks for guillotines (Pack of 6)	Ref. no.	RRP
GUILLOTINE CUTTING STICK 3115 M	INT-GU-CON-40001	ON REQUEST
GUILLOTINE CUTTING STICK 4340 M	INT-GU-CON-40002	ON REQUEST
GUILLOTINE CUTTING STICK 4980 D	INT-GU-CON-40000	ON REQUEST
GUILLOTINE CUTTING STICK 4540 EP	INT-GU-CON-40003	ON REQUEST
GUILLOTINE CUTTING STICK 4880 EPS	INT-GU-CON-40005	ON REQUEST
GUILLOTINE CUTTING STICK 6680 EPS	INT-GU-CON-40008	ON REQUEST
GUILLOTINE CUTTING STICK 5280 EPSH	INT-GU-CON-40012	ON REQUEST
GUILLOTINE CUTTING STICK 5280 EPSH POWERCUT	INT-GU-CON-40011	ON REQUEST
GUILLOTINE CUTTING STICK 7310 EPSHP POWERCUT	INT-GU-CON-40010	ON REQUEST
Special accessories for guillotines	Ref. no.	RRP
WOODEN JOGGING BLOCK FROM 430 TO 450 MM	INT-GU-CON-50001ME	ON REQUEST
WOODEN JOGGING BLOCK FROM 480 TO 730 MM	INT-GU-CON-50002ME	ON REQUEST

### intimus WW-200 DUO

Manual O-wire binding machine for medium use in offices, digital printing centres, etc. Metal construction. Punching width: up to 300 mm. Binding capacity: up to 280 sheets. Number of punching stamps: 34/23. O-wire dimensions: 6 to 32 mm. Pitches: 3:1 & 2:1. Punching depth adjustment. Lateral stop adjustment. CE-certified.

*Dimensions (W x D x H): 360 x 440 x 190 mm.  
Weight: 14 kg.*



Model	Punching capacity	Punching type	Maximum size	Ref. no.	RRP
intimus WW-200 DUO	20 sheets / 80 g	Manual	A4	INT-BI-WW200DUO	ON REQUEST

### intimus WW-200E DUO

Electric O-wire binding machine for medium use in offices, digital printing centres, etc. Metal construction. Punching width: up to 300 mm. Binding capacity: up to 280 sheets. Number of punching stamps: 34/23. O-wire dimensions: 6 to 32 mm. Pitches: 3:1 & 2:1. Punching depth adjustment. Lateral stop adjustment. CE-certified.

*Dimensions (W x D x H): 460 x 440 x 190 mm.  
Weight: 20 kg.*



Model	Punching capacity	Punching type	Maximum size	Ref. no.	RRP
intimus WW-200E DUO	20 sheets / 80 g	Electric	A4	INT-BI-WW200EDUO	ON REQUEST

### intimus CW-200E DUO

Electric O-wire and comb binding machine for medium use in offices, digital printing centres, etc. Metal construction. Punching width: up to 300 mm. Binding capacity: up to 135 sheets (O-wire) and 450 sheets (comb). Number of punching stamps: 34 (O-wire, pitch: 3:1) and 21 (comb). Wire dimensions: 6 to 14 mm (O-wire) and 6 to 51 mm (comb). Punching depth adjustment. Lateral stop adjustment. CE-certified.

*Dimensions (W x D x H): 460 x 440 x 225 mm.  
Weight: 20 kg.*



Model	Punching capacity	Punching type	Maximum size	Ref. no.	RRP
intimus CW-200E DUO	25 sheets / 80 g 20 sheets / 80 g	Electric	A4	INT-BI-CW200EDUO	ON REQUEST

## Binding Machines

### intimus PW-150

Manual O-wire binding machine for moderate use in offices and digital printing centres. Metal construction. Metal construction. Punching width: up to 300 mm. Binding capacity: up to 143 sheets. Horizontal manual punching lever to reduce effort. Number of punching stamps: 34. O-wire dimensions: 6 to 14 mm. Pitch: 3:1. Punching depth adjustment. Lateral stop adjustment. CE-certified.

*Dimensions (W x D x H): 445 x 210 x 288 mm.  
Weight: 6.6 kg.*



Model	Punching capacity	Punching type	Maximum size	Ref. no.	RRP
intimus PW-150	15 sheets / 80 g	Manual	A4	INT-BI-00PW150	ON REQUEST

### intimus PB-150

Manual comb binding machine for moderate to medium use in offices and digital printing centres. Metal construction. Punching width: up to 300 mm. Binding capacity: up to 500 sheets. Horizontal manual punching lever to reduce effort. Number of punching stamps: 21. Comb dimensions: 6 to 51 mm. Punching depth adjustment. Lateral stop adjustment. CE-certified.

*Dimensions (W x D x H): 445 x 210 x 288 mm.  
Weight: 5 kg.*



Model	Punching capacity	Punching type	Maximum size	Ref. no.	RRP
intimus PB-150	15 sheets / 80 g	Manual	A4	INT-BI-00PB150	ON REQUEST

### intimus PB-250

Manual comb binding machine for medium use in offices, digital printing centres, copy shops, etc. Metal construction. Punching width: up to 300 mm. Binding capacity: up to 500 sheets. Horizontal manual punching lever to reduce effort. Number of punching stamps: 21. Comb dimensions: 6 to 51 mm. Punching depth adjustment. Lateral stop adjustment. CE-certified.

*Dimensions (W x D x H): 497 x 288 x 441 mm.  
Weight: 11 kg.*



Model	Punching capacity	Punching type	Maximum size	Ref. no.	RRP
intimus PB-250	25 sheets / 80 g	Manual	A4	INT-BI-00PB250	ON REQUEST

### intimus TBI-500

Thermal binding machine for pre-glued covers. Robust metal construction. For use in offices or digital printing centres. Cooling system to reduce waiting time. Acoustic signal after pre-heating time. Binding capacity: up to 500 sheets. Attractive design and very easy to use. CE-certified.

*Dimensions (W x D x H): 380 x 240 x 170 mm.  
Weight: 4.2 kg.*



Model	Binding capacity	Max. binding size	Ref. no.	RRP
intimus TBI-500	500 sheets / 80 g	A4	INT-BI-0TBI500	ON REQUEST

## Consumables for Binding Machines

O-wire & Comb Binding	Ref. no.	RRP
PVC binding cover A4, 150 mic, clear (100 pcs)	INT-BI-CON-100150	ON REQUEST
PVC binding cover A4, 180 mic, clear (100 pcs)	INT-BI-CON-100180	ON REQUEST
Leather grain binding cover A4, 230 g, black (100 pcs)	INT-BI-CON-102230	ON REQUEST
Binding wire 34 loops, 5 mm, black (100 pcs)	INT-BI-CON-122005	ON REQUEST
Binding wire 34 loops, 6 mm, black (100 pcs)	INT-BI-CON-122006	ON REQUEST
Binding wire 34 loops, 8 mm, black (100 pcs)	INT-BI-CON-122008	ON REQUEST
Binding wire 34 loops, 10 mm, black (100 pcs)	INT-BI-CON-122010	ON REQUEST
Binding wire 34 loops, 12 mm, black (100 pcs)	INT-BI-CON-122012	ON REQUEST
Binding wire 23 loops, 16 mm, black (50 pcs)	INT-BI-CON-122016	ON REQUEST
Binding wire 23 loops, 22 mm, black (50 pcs)	INT-BI-CON-122022	ON REQUEST
Plastic comb 21 loops, 12 mm, black (100 pcs)	INT-BI-CON-112012	ON REQUEST
Plastic comb 21 loops, 22 mm, black (50 pcs)	INT-BI-CON-112022	ON REQUEST
Plastic comb 21 loops, 35 mm, black (50 pcs)	INT-BI-CON-112035	ON REQUEST

Thermal Binding	Ref. no.	RRP
Thermal binding cover A4, 1 mm, tc/w (100 pcs)	INT-BI-CON-001001	ON REQUEST
Thermal binding cover A4, 3 mm, tc/w (100 pcs)	INT-BI-CON-001003	ON REQUEST
Thermal binding cover A4, 6 mm, tc/w (100 pcs)	INT-BI-CON-001006	ON REQUEST
Thermal binding cover A4, 10 mm, tc/w (80 pcs)	INT-BI-CON-001010	ON REQUEST
Thermal binding cover A4, 15 mm, tc/w (80 pcs)	INT-BI-CON-001015	ON REQUEST
Thermal binding cover A4, 20 mm, tc/w (60 pcs)	INT-BI-CON-001020	ON REQUEST
Thermal binding cover A4, 24 mm, tc/w (60 pcs)	INT-BI-CON-001024	ON REQUEST
Thermal binding cover A4, 30 mm, tc/w (50 pcs)	INT-BI-CON-001030	ON REQUEST

## Consumables for Laminators

Laminating pouches	Ref. no.	RRP
Laminating pouch A4, 75 mic (100 units)	INT-LA-CON-040075	ON REQUEST
Laminating pouch A4, 125 mic (100 units)	INT-LA-CON-040125	ON REQUEST
Laminating pouch A3, 75 mic (100 units)	INT-LA-CON-030075	ON REQUEST
Laminating pouch A3, 125 mic (100 units)	INT-LA-CON-030125	ON REQUEST

## Laminators

### intimus PL-100

Office laminator for occasional use. Simple and intuitive control panel. Laminates up to 125 µm. Widths up to 235 mm. Hot and cold lamination. “Ready-to-use” indicator. Ready for operation within 1 minute. Power: 400 W. Automatic shutdown after 30 minutes. CE-certified.

Dimensions (W x D x H): 360 x 112 x 65 mm.  
Weight: 1.1 kg.



Model	Lamination width	Lamination speed	Number of rollers	Warm-up time	Ref. no.	RRP
intimus PL-100	A4	420 mm/min	2	1 min	INT-LA-00PL100	ON REQUEST

### intimus PL-200

Office laminator for occasional use. Simple and intuitive control panel. Laminates up to 125 µm. Widths up to 330 mm. “Ready-to-use” indicator. Ready for operation within 3-4 minutes. “Reverse Mode” button. Power: 500 W. CE-certified.

Dimensions (W x D x H): 470 x 116 x 98 mm.  
Weight: 2.2 kg.



Model	Lamination width	Lamination speed	Number of rollers	Warm-up time	Ref. no.	RRP
intimus PL-200	A3	480 mm/min	2	3-4 min	INT-LA-00PL200	ON REQUEST

### intimus PL-400

Office laminator for medium use. Simple and intuitive control panel. Laminates up to 125 µm. Widths up to 320 mm. Hot and cold lamination. “Ready-to-use” indicator. Ready for operation within 1 minute. “Reverse Mode” button. Power: 800 W. Automatic shutdown after 30 minutes. CE-certified.

Dimensions (W x D x H): 470 x 146 x 123 mm.  
Weight: 2.8 kg.



Model	Lamination width	Lamination speed	Number of rollers	Warm-up time	Ref. no.	RRP
intimus PL-400	A3	500 mm/min	4	1 min	INT-LA-00PL400	ON REQUEST

### intimus PL-320 & 450 Profesional

Laminator for medium to heavy use in offices, digital printing centres, etc. Easy-to-use and intuitive control panel. Laminates up to 250 µm. Ready for operation within 3-4 minutes. “Reverse Mode” button. Power: 600 W/ 800 W. CE-certified.

Dimensions 320 (W x D x H): 500 x 210 x 100 mm. / Weight: 7.5 kg.  
Dimensions 450 (W x D x H): 615 x 210 x 100 mm. / Weight: 10.5 kg.



Model	Lamination width	Lamination speed	Number of rollers	Warm-up time	Ref. no.	RRP
intimus PL-320 PRO	A3	450 mm/min	4	3-4 min	INT-LA-PL320PRO	ON REQUEST
intimus PL-450 PRO	A2	450 mm/min	4	3-4 min	INT-LA-PL450PRO	ON REQUEST



## Laminators // Creasing & Perforating Machines

### intimus PL-340 High Speed

Laminator for medium to heavy use in offices, digital printing centres, etc. Easy-to-use and intuitive control panel. Digital control panel. Temperature and speed control. Laminates up to 350 µm. "Auto Reverse Mode" anti-jamming system. Ready for operation within 6-8 minutes. Power: 1200 W. CE-certified.

Dimensions (W x D x H): 520 x 356 x 182 mm.  
Weight: 22 kg.



Model	Lamination width	Lamination speed	Number of rollers	Warm-up time	Ref. no.	RRP
intimus PL-340 High Speed	A3	1800 mm/min	4	6-8 min	INT-LA-PL340HS	ON REQUEST

### intimus CR-460 MC

Durable manual creasing machine made of metal. Suitable for creasing books, calendars, menus, cards, tickets, greeting cards, etc. Creasing depth: 0.4 mm. Width: 460 mm.

Dimensions (W x D x H): 600 x 490 x 130 mm.  
Weight: 9 kg.



Model	Operation	Max. thickness	Creasing width	Ref. no.	RRP
intimus CR-460 MC	MANUAL	350-400 g	1.3 mm	INT-CR-00460MC	ON REQUEST

### intimus CR-360 MCP

Durable manual creasing machine and microperforator made of metal. Suitable for creasing or microperforating books, calendars, menus, cards, tickets, greeting cards, etc. Creasing depth: 0.4 mm. Microperforation depth: 1.2 mm. Creasing or microperforation width: 340 mm.

Dimensions (W x D x H): 600 x 385 x 140 mm.  
Weight: 7.8 kg.



Model	Operation	Max. thickness	Creasing width	Ref. no.	RRP
intimus CR-360 MCP	MANUAL	350-400 g	1.3 mm	INT-CR-0360MCP	ON REQUEST

### intimus CR-460 ECP

Durable electric creasing machine and microperforator made of metal. Suitable for creasing or microperforating books, calendars, menus, cards, tickets, greeting cards, etc. Creasing depth: 0.5 mm. For SRA2 format. CE-certified.

Dimensions (W x D x H): 710 x 540 x 245 mm.  
Weight: 42.3 kg.



Model	Operation	Max. thickness	Creasing width	Ref. no.	RRP
intimus CR-460 ECP	ELECTRIC	350-400 g	1.3 mm	INT-CR-0460ECP	ON REQUEST

## Folding Machines

### intimus F-7200 (A4)

Compact desktop document folding machine with different folding modes. Feeds and folds paper automatically. Ideal for small volumes of work in offices, associations and churches. Push-down feed unit with capacity for up to 50 sheets. Simultaneous folding up to 3 sheets at a time in semi-automatic manual mode. Easy to set up. Easy selection of the desired folding type with indicators on the folding tray. Output tray for folded papers included. CE-certified.

Dimensions (W x D x H): 340 x 520 x 270 mm.

Weight: 7 kg.



Model	Folding speed	Folding type	Document size	Paper weight	Ref. no.	RRP
intimus F-7200	4000 sheets/hour	Multiple	A5-A4	60-105 g	39556	ON REQUEST

### intimus F-200 (A4)

Desktop document folding machine with different folding modes. Robust metal construction for short and repetitive runs as well as peaks. Staged exit of the paper to avoid mixing of already folded pieces. Push-down feed unit with capacity for up to 250 sheets. Easy commissioning and selection of folding types with clear pictograms on the folding tray. Digital LCD display with indicators. Resettable forward and backward unit counter. 3 robust paper feed rollers. CE-certified.

Dimensions (W x D x H): 425 x 670 x 360 mm.

Weight: 18 kg.



Model	Folding speed	Folding type	Document size	Paper weight	Ref. no.	RRP
intimus F-200	7200 sheets/hour	Multiple	B6-A4	60-120 g	INT-FO-000F200	ON REQUEST

### intimus F-300 (A3)

Desktop document folding machine with different folding modes. Robust metal construction for short and repetitive runs as well as peaks in copy shops, digital printing centres and small graphic design offices. Staged exit of the paper to avoid mixing of already folded pieces. Push-down feed unit with capacity for up to 450 sheets. Easy commissioning and selection of folding types with clear pictograms on the folding tray. Digital LCD display with indicators. Resettable forward and backward unit counter. 4 robust paper feed rollers. CE-certified.

Dimensions (W x D x H): 520 x 890 x 480 mm.

Weight: 35 kg.



Model	Folding speed	Folding type	Document size	Paper weight	Ref. no.	RRP
intimus F-300	7200 sheets/hour	Multiple	B6-A3	50-160 g	INT-FO-000F300	ON REQUEST

### intimus TSI-2.0 S / 2.5 S

Compact desktop folder-inserter with 2 configuration options. Folds and inserts documents and closes the envelope fully automatically with an optional inline connection to the franking machine. Double document detector on each feeder to ensure that each envelope contains the correct documents. Possibility of working with different document formats (A4, A5, 12", brochures, pamphlets and fliers). Accepts American size envelopes - C6/5 and C5. Easy access to the documents and envelopes throughout the process. High-capacity envelope feed / output. Colour touchscreen with clear texts and pictograms in local language. Simultaneous folding capacity: up to 5 sheets. CE-certified.



Dimensions (W x D x H): 660 x 430 x 560 mm.  
Weight: 36 kg.

Model	Feeders	Job memories	Envelope format	Load & Go	Ref. no.	RRP
intimus TSI-2.0 S	2	15	Up to C5	YES	INT-INS-TSI2.0S-EU	ON REQUEST
intimus TSI-2.5 S	2.5	15	Up to C5	YES	INT-INS-TSI2.5S-EU	ON REQUEST
<b>Accessories</b>	Tri-Fold kit				A0111193	ON REQUEST

### intimus TSI-4s

Compact desktop folder-inserter with 4 configuration options. Folds and inserts documents and closes the envelope fully automatically with an optional inline connection to the franking machine. Double document detector on each feed to ensure that each envelope contains the correct documents. Accepts different document formats (A4, A5, 12", brochures, pamphlets and fliers). Accepts American size envelopes - C6/5 and C5. Easy access to the documents and envelopes throughout the process. Low noise level. Colour touchscreen in local language. Multiple feeding from each feeder. Intelligent OMR, BCR and 2D scanning option. Simultaneous folding capacity: up to 5 sheets (premium version optional for increased folding capacity up to 8 pages in V fold). CE-certified.



Dimensions (W x D x H): 740 x 670 x 1360 mm.  
Weight: 66-72 kg.

Model	Feeders	Job memories	Envelope format	Load & Go	Ref. no.	RRP
intimus TSI-4s (1)	1	50	Up to C5	YES	A0106850	ON REQUEST
intimus TSI-4s (1.5)	1.5	50	Up to C5	YES	A0106851	ON REQUEST
intimus TSI-4s (2)	2	50	Up to C5	YES	A0106852	ON REQUEST
intimus TSI-4s (2.5)	2.5	50	Up to C5	YES	ON REQUEST	ON REQUEST

## Folder Inserters

### intimus TSI-5

Compact desktop folder-inserter with 4 configuration options. Folds and inserts documents and closes the envelope fully automatically with an optional inline connection to the franking machine. Double document detector to ensure that each envelope contains the correct documentation. Accepts different document formats (A4, A5, 12", brochures, pamphlets and fliers). Accepts American size envelopes - C6/5 and C5. Easy access to the documents and envelopes throughout the process. Low noise level. Colour touchscreen in local language. Multiple feeding from each feed. Intelligent OMR, BCR and 2D scanning option. Simultaneous folding capacity: up to 8 sheets (C fold) and 10 sheets (V fold). CE-certified.



Dimensions (W x D x H): 780 x 670 x 1360 mm.

Weight: 7 kg.

Model	Feeders	Job memories	Envelope format	Load & Go	Ref. no.	RRP
intimus TSI-5 Exp.	3	50	Up to C5	YES	A0091498	ON REQUEST
intimus TSI-5 Spc.	3	50	Up to C5	YES	A0091499	ON REQUEST
intimus TSI-5 Exp. HCDF	1 HCDF + 1	50	Up to C5	YES	A0091501	ON REQUEST
intimus TSI-5 Spc. HCDF	1 HCDF + 1	50	Up to C5	YES	A0091500	ON REQUEST

### intimus TSI-6

Intelligent and versatile desktop folder inserter available in multiple configurations from 2 up to 6 document feeders. All feeders have double document detection and flexfeed function to allow processing of multi format documents/inserts. Set thickness detection before insertion to guarantee all content is inserted. Colour touchscreen in local language can store up to 50 jobs. The intimus TSI-6 can process American size envelopes - C6/5 and C5 with a maximum speed of 4000 envelopes per hour. Optional up to 2 maxifeeder trays, good for 350 BRE or 1200 documents. Optional high capacity vertical stacker can hold up to 500 finished envelopes. Intelligent OMR, BCR and 2D scanning with CIS reading system. Simultaneous folding capacity up to 8 sheets (C fold) and 10 sheets (V fold). CE-certified.



Dimensions (W x D x H): 1480, 1650 (including HCVS) x 415 x 740-970 mm.

Weight: 97-101 kg.

Model	Feeders	Job memories	Envelope format	Load & Go	Ref. no.	RRP
intimus TSI-6 (2)	2	50	Up to C5	YES	ON REQUEST	ON REQUEST
intimus TSI-6 (3)	1 HCDF + 2	50	Up to C5	YES	ON REQUEST	ON REQUEST
intimus TSI-6 (4)	4	50	Up to C5	YES	ON REQUEST	ON REQUEST
intimus TSI-6 (5)	1 HCDF + 4	50	Up to C5	YES	ON REQUEST	ON REQUEST
intimus TSI-6 (6)	6	50	Up to C5	YES	ON REQUEST	ON REQUEST

### intimus TSI-7

Intelligent and versatile desktop folder inserter available in multiple configurations from 2 up to 7 document feeders. All tower feeders have double document detection and flexfeed function to allow processing of multi format documents/ inserts. Set thickness detection before insertion to guarantee all content is inserted. Colour touchscreen in local language can store up to 50 jobs. The intimus TSI-7 can process American size envelopes - C6/5 and C5 with a maximum speed of 4300 envelopes per hour. Optional up to 2 maxifeeder trays, good for 350 BRE or 1200 documents. The intimus TSI-7 has as a standard a high capacity vertical stacker that can hold up to 500 finished envelopes and a left or right-handed secondary output. Optional in line versafeeder to run stiff media, booklets etc. Intelligent OMR, BCR and 2D scanning with CIS reading system. Simultaneous folding capacity up to 8 sheets (C fold) and 10 sheets (V fold). CE-certified.



*Dimensions (W x D x H): 1540, 1955 (including versa feeder) x 465 x 740 - 970 mm.  
Weight: 115-137 kg.*

Model	Feeders	Job memories	Envelope format	Load & Go	Ref. no.	RRP
intimus TSI-7 (2)	2	50	Up to C5	YES	ON REQUEST	ON REQUEST
intimus TSI-7 (3)	1 HCDF + 2	50	Up to C5	YES	ON REQUEST	ON REQUEST
intimus TSI-7 (4)	4	50	Up to C5	YES	ON REQUEST	ON REQUEST
intimus TSI-7 (5)	1 HCDF + 4	50	Up to C5	YES	ON REQUEST	ON REQUEST
intimus TSI-7 (6)	6	50	Up to C5	YES	ON REQUEST	ON REQUEST

## Adress Printer // Letter Opener

### intimus AP-COLOR

The AP COLOR addressing machine helps you to address and send direct marketing mailings and personalise envelopes, cards, labels, etc. with a fixed Memjet print head for high-quality and low-cost printing. A fast and robust colour printer for offices, handling centres, direct marketing agencies, copy shops, digital printing centres, graphic designers, etc. High print quality of up to 1600 dpi. Patented MemJet technology. Wide range of colours and fonts. Prints envelopes up to size C4. CE-certified.



Dimensions (W x D x H): 608 x 508 x 457 mm.  
Weight: 34 kg.

Model	Speed	Print heads	DPI	Ref. no.	RRP
intimus AP-COLOR	7,500 letters/hour	1 MemJet	1600 x 1600	A0072927	ON REQUEST
<b>Accessories</b>	FEEDING CONVEYOR			4156406P	ON REQUEST
<b>Consumables</b>	INK CARTRIDGE - BLACK			4156196V	ON REQUEST
	INK CARTRIDGE - CYAN			4156197W	ON REQUEST
	INK CARTRIDGE - YELLOW			4156199Y	ON REQUEST
	INK CARTRIDGE - MAGENTA			4156198X	ON REQUEST
	PRINthead CARTRIDGE			4156195U	ON REQUEST

### intimus LO 1632

Envelope opener with automatic feed. Compact office equipment of excellent design. Processes stacks of envelopes of up to 4.5 cm high. Complete protection for the user's fingers. Can process up to 120 envelopes per minute. Rubber supports to prevent slipping and vibrations. Process mail up to 5 mm thick. Very low noise level. CE-certified.



Dimensions (W x D x H): 150 x 360 x 320 mm.  
Weight: 2.9 kg.

Model	Speed	Automatic feed	Envelope thickness	Ref. no.	RRP
intimus LO 1632	120 letters/min	YES	5 mm	39661	ON REQUEST

All information in this catalogue are subject to technical and optical modifications.



# WHY INTIMUS?

intimus International Group is a company headquartered in Markdorf, Germany, with regional offices in 9 countries around the world, representatives in more than 180 countries and about 250 employees. Founded in 1956 as SCHLEICHER – the inventor of the office shredder –, the intimus brand was born in 1965 with the introduction of the intimus SIMPLEX shredder. Our goal is to continually push the data security industry forward, ensuring that our clients and their confidential data remain secure and uncompromised. We offer comprehensive solutions throughout the value chain, starting from innovation, development, manufacturing following strict quality standards and sales, to the provision of an efficient technical after-sales service.

Since its inception, intimus has never stopped innovating. In 1985, we revolutionised the data security market with the invention of the first paper shredder featuring the “Cross Cut” paper shredding technology in 1985. A few years later, in 1990, the first industrial and optical media shredding solutions were introduced. In 2016 followed the launch of the optical media shredder FlashEx, the first system for the secure destruction of USB thumb drives, SSD devices, CDs, mini tablets, etc.



**TURNOVER  
ABOUT €40M**



**ABOUT 250  
EMPLOYEES**



**HEADQUARTERS IN MARKDORF,  
GERMANY**



**2 PRODUCTION  
CENTRES**



**SUBSIDIARIES IN 9 COUNTRIES  
REPRESENTATIVES IN OVER  
180 COUNTRIES**



**intimus International GmbH**

Bergheimer Straße 6-16

88677 Markdorf

T: +49 (0) 7544 / 60-0

E: [sales.de@intimus.com](mailto:sales.de@intimus.com)

W: [www.intimus.com](http://www.intimus.com)